

## #4509 FAST DRYING RUBBERIZED UNDERCOAT

A premium quality, rubber based undercoating with outstanding adhesion and abrasion resistance. Dries quickly and is tack free. Exceptionally tough and highly flexible. Use on undercarriage, doors, trunks and fenders. Good texture and is paintable with no bleed-through. Seals and protects. Sound Deadens. Prevents rust. Exhibits unique leveling qualities that aid in achieving a smooth, uniform surface. Will not chip, crack or peel.

### BENEFITS


Seals and protects  
Sound deadener  
Rust preventative  
Superior salt corrosion protection  
Dries to the touch in less than 30 minutes  
Contains no asphalt!  
50 State Compliant

### APPLICATIONS

All automotive types  
Can be used as a protective coating for metal applications

### TECHNICAL DATA

Appearance	Opaque
Color	Black
Odor	Solvent
Odor Threshold	No info available
pH	No info available
Melting/Freezing Point	No info available
Boiling Point/Boiling Range	No info available
Flash Point:	-104°C / -155°F
Flammability Limits In Air	
Upper	No info available
Lower	No info available
Vapor Pressure	No info available
Vapor Density	No info available
Specific Gravity:	1.189
Water Solubility	Practically insoluble
Partition coefficient: n-octanol/water	No info available
Autoignition Temperature	No info available
Explosive Properties	No info available
VOC Content (%)	39.92

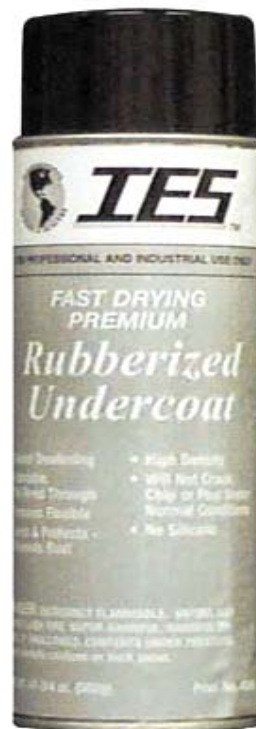

**FAST DRYING  
PAINTABLE  
HIGH SOLIDS  
SEALS AND PROTECTS-  
PREVENTS RUST**

### DIRECTIONS

1. Shake can well before using. Ensure the agitator ball moves freely. Reshake intermittently during use.
2. Surface must be clean, dry and free of all loose contaminants. Protect surrounding areas from spray mist. For best results, use when can is between 50°F and 90°F (10°C and 32°C).
3. Hold can 12-14 inches from surface and apply a uniform coating by moving from side to side and overlapping the strokes.
4. Invert can and spray until only gas releases to prevent valve and tip from clogging. Overspray can be removed with mild solvents.

### PRODUCT AVAILABLE

**4509**                      24 oz. Aerosol Can                      12 per case  
Net Weight 18 oz.

NOTICE TO PURCHASER: The following warranty is in lieu of all other expressed or implied warranties, specifically all goods are manufactured of first class materials and by competent professionals. We have no control over the use and application of our products. Our liability shall not exceed the purchase price.