


## Fine Line Tape

Introducing the new Fine Line tape from S&R Fastener Company! Created with a resilient PVC film substrate resulting in good solvent resistance, great conformability and a smooth sharp mask-off edge. Ideal for OEM automotive high-temp masking, aftermarket autobody fineline masking, lettering, striping, creating two-tone separation lines, curved or sharp lines, irregular panels and many other complex or irregular surfaces. Offers high temperature resistance through bake cycles up to 311°F for 45 minutes.

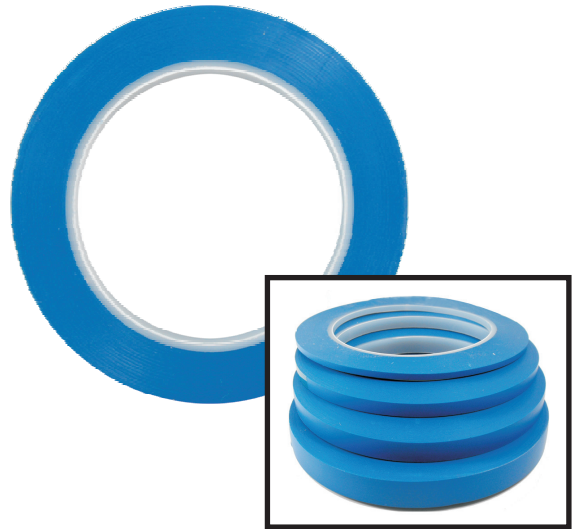

### TECHNICAL PROPERTIES

#### Product Construction

**Color:** Blue  
**Backing:** 0.13 mm Poly Vinyl Chloride  
**Adhesive:** Rubber blend pressure sensitive adhesive - provides high tack

#### Testing Details:

Adhesion to Steel 16.42 N/100mm  
Adhesion to Steel (20 min. dwell) 26.3 N/100mm  
Tensile Strength 210 N/100mm  
Elongation (at break) 100%  
Service Temperature Range 0°C - 311°F  
Resistance to Solvent Very Good

#### Application Temperature:

Between 59°F and 86°F

#### Application Details:

Make sure surface is clean from dust, dirt, grease and all other contaminants. Apply with maximum pressure to achieve maximum pressure levels. The optimum performance level will be reached after a bonding period of 24 hours at 72°F.

#### Storage / Shelf Life:

Store in a clean, dry and well ventilated area. Optimum storage temperature of 50°F and 86°F. One year shelf life when stored properly.

PROD	WIDTH x LENGTH	
70750	1/8" x 36 yards	4 per box
70751	1/4" x 36 yards	4 per box
70752	3/8" x 36 yards	4 per box
70753	1/2" x 36 yards	4 per box